
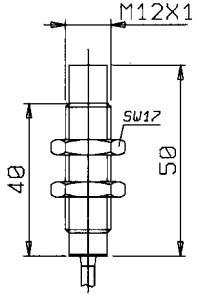
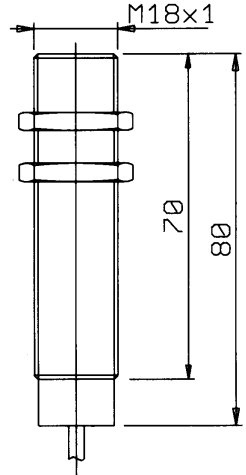
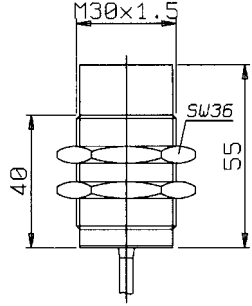


Inductive

Linear Voltage Output Inductive

	MODEL		
Output Function: Linear, PNP	S722	S1041	S723
Dimensions: mm 1 mm = .03937"			
CE			
Detecting range	0.3 - 5 mm	1 - 4 mm	3.5 - 11 mm
External diameter	M 12 x 1	M 18 x 1	M 30 x 1.5
Linear error	< 3%	< 5%	< 1.5%
Power supply	17 - 30 Vdc	18 - 30 Vdc	17 - 30 Vdc
Output voltage	0 - 10 V	1 - 9 V	0 - 10 V
Power drain	< 22 mA	< 10 mA	< 33 mA
Load	300 Ω min	2 kΩ min	1 kΩ min
Case	Nickel-plated brass		
Flush mounting	No	Yes	No
Protection degree	IP 67		
Operating temperature	0 to +70 °C	-25 to +70 °C	0 to 60 °C
Temperature drift	< 5%		< 4%
Output connection	Cable: 24 AWG, L=2 m (R-A2TMC/XVP: 22 AWG)		

WIRING:



- 1: blue
- 2: white or black
- 3 brown or red